


DRILLCOM

TECHNICAL SPECIFICATIONS

RD22

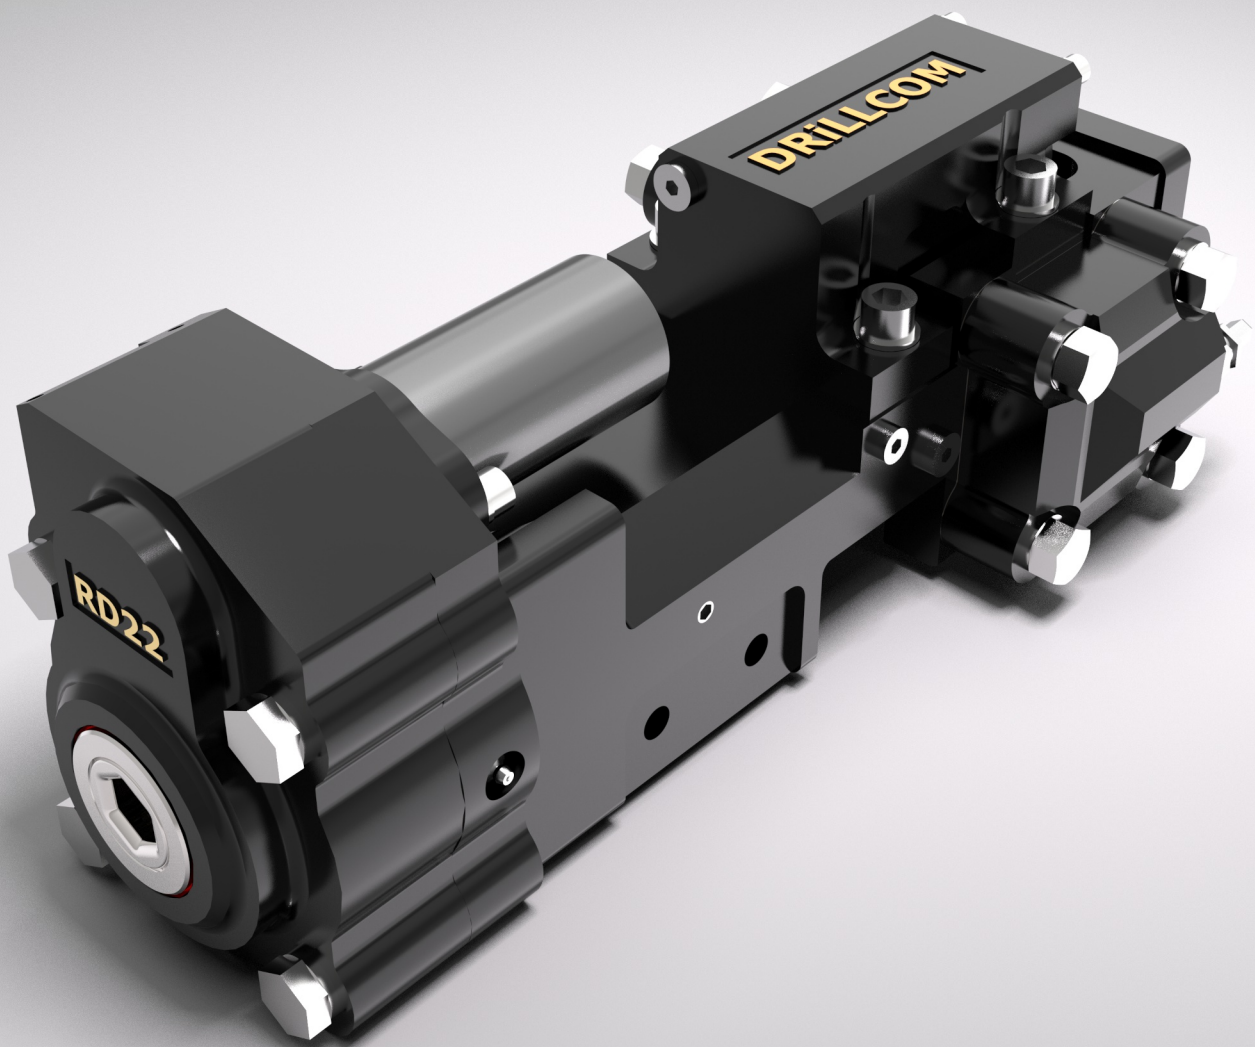

ENERGY EFFICIENT

Versatile applications for general drilling and quarry stone.


2025

MAIN DIMENSIONS & SPECIFICATIONS

Hole Range	27 - 45 mm
Power Class	5,5 kW
Percussion Rate	70 Hz
Perc. Kinetic Energy	70 J
Perc. Oil Flow	40-44 L/min @160bar
Perc. Pressure	80-160 bar
Rotation Speed	200-400 rpm
Rotation Torque	70-170 Nm
Rotation Flow	11 - 18 L/min max
Rotation Pressure	120 bar max
Shank Hex	22x108 & 25x 108 mm
Shank Lubrication	4 bar min, 250-300 L/min
Flushing: Water Pressure & Flow	6 bar max, 15-20 L/min
Flushing: Air Pressure & Flow	6 bar max, 800 L/min
WATER FLUSHING PRESSURE MUST BE 1-2 bar LOWER THAN SHANK LUBRICATION PRESSURE	
Accumulator Pressure	55 & 4 bar
Weight	63 kg

RD22

MEASUREMENTS AND CONNECTIONS

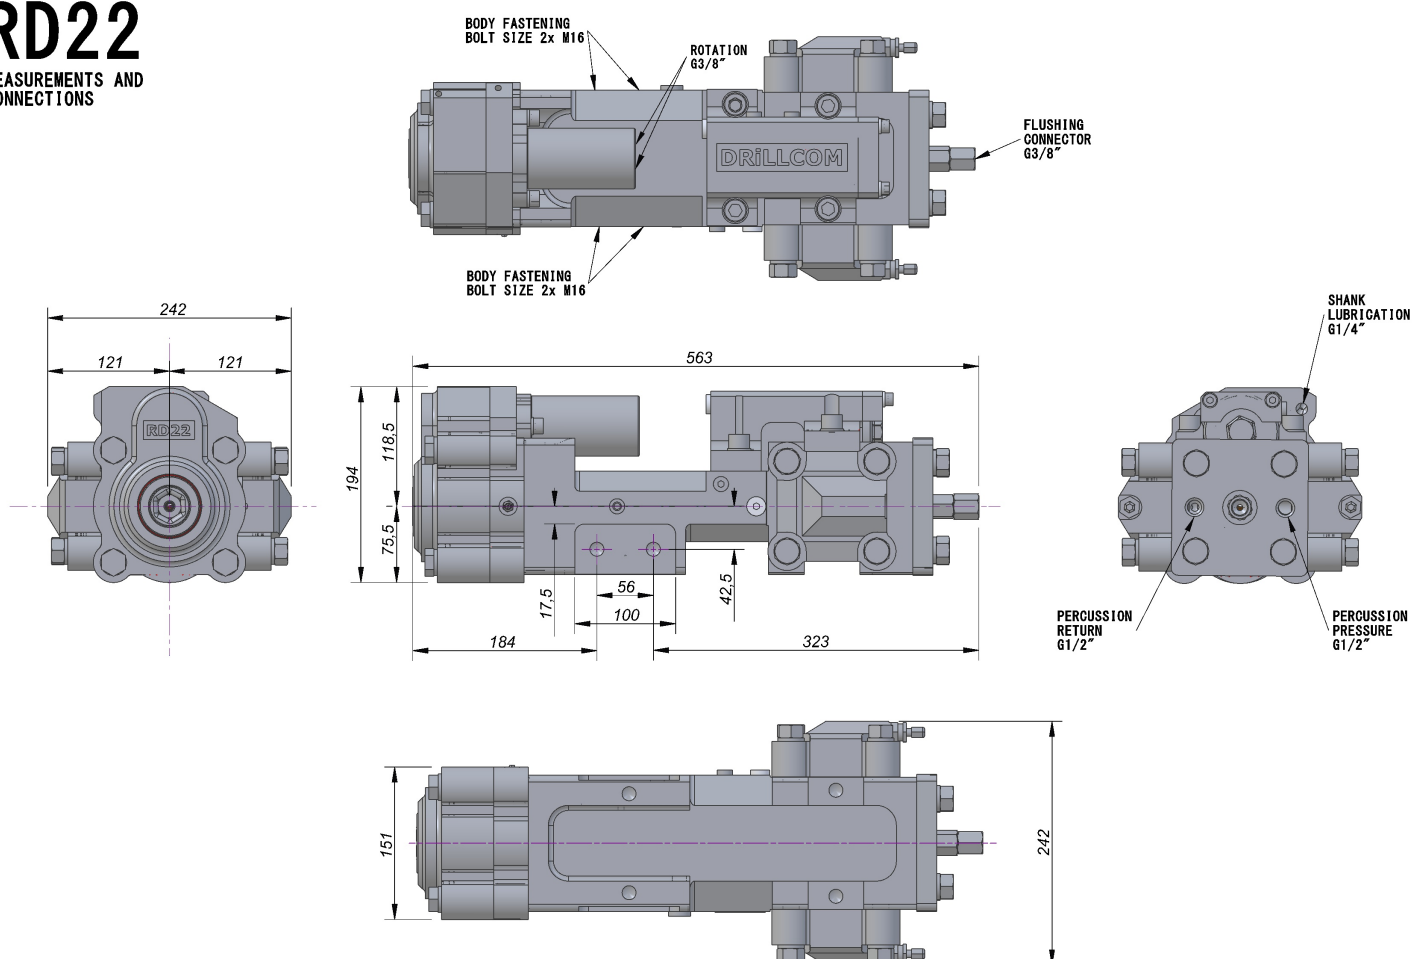

DRILLCOM